

ODNW65UC



User Manual

User Manual

1. WELCOME	3
2. ODNW65UC BT OVERVIEW	4
2.1 HEADSET OVERVIEW	4
2.2 OPTIONAL ACCESSORIES	5
3. HOW TO WEAR	6
3.1 STEREO	6
3.2 ADJUST THE HEADBAND	7
3.3 POSITION THE MICROPHONE	7
3.4 STORING THE MICROPHONE	8
4. HOW TO CHARGE THE BATTERY	9
5. HOW TO CONNECT	10
5.1 CONNECT TO PC (USING USB Dongle)	10
5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH)	11
6. HOW TO USE	12
6.1 CALLS	13
6.2 MULTIPLE CALL HANDLING	14
7. SUPPORT	15
7.1 HOW TO CARE FOR YOUR HEADSET	15
8. TECHNICAL SPECIFICATION	15
9. Product Disposal Treatment and FCC statement	17

1. WELCOME


Thank you for using the ODNW65UC BT Headset. We hope you will enjoy it!

ODNW65UC BT HEADSET FEATURES

- Connects to PC via USB Dongle Bluetooth adapter
- Connects to mobile devices via Bluetooth
- Integrated busylight
- Rotate the microphone boom-arm back to vertical position when not on calls
- Superior music and voice capabilities
- Hi-Fi Sound

2. ODNW65UC BT OVERVIEW

2.1 HEADSET

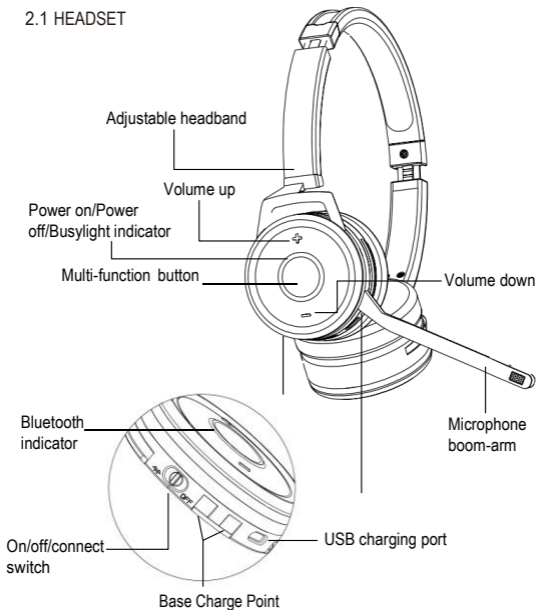


2.2 INCLUDED ACCESSORIES



Carry pouch



USB cable



Charging Base (Optional)

3. HOW TO WEAR



3.1 RIGHT WEARING STYLE

The ODNW65UC BT DUO can be worn only on the right.

3.2 ADJUST THE HEADBAND

Adjust the headband to find the most comfortable fit.




3.3 POSITION THE MICROPHONE

It is recommended to position the microphone close to your mouth (0.5 inches).




The microphone is bendable for personal preference.

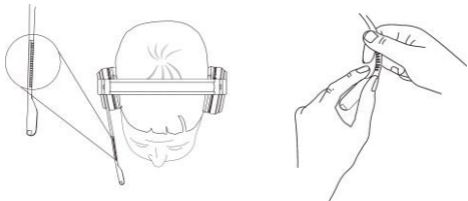

3.4 STORING THE MICROPHONE

When listening to music or outdoors, the microphone boom-arm can be rotated back to the vertical position near the headband.




4. HOW TO CHARGE THE BATTERY

Option 1: The headset battery will charge when connected to a PC using a USB cable, or when using any USB charger supplied with your mobile device.

Option 2: If you have a charging base, you could plug the charging base into a powered USB port and then dock the headset.

It takes approx. 3 hours to charge the battery.

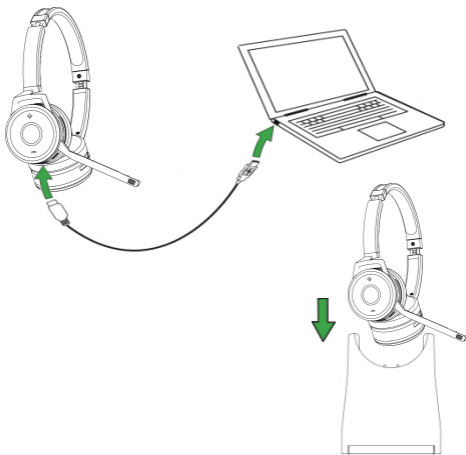

5. HOW TO CONNECT


5.1 CONNECT TO PC (USING USB Dongle)

1. Ensure the headset is switched on.
2. Plug the USB Dongle into a USB port on your PC. The headset and USB Dongle are already pre-connected.




5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH)

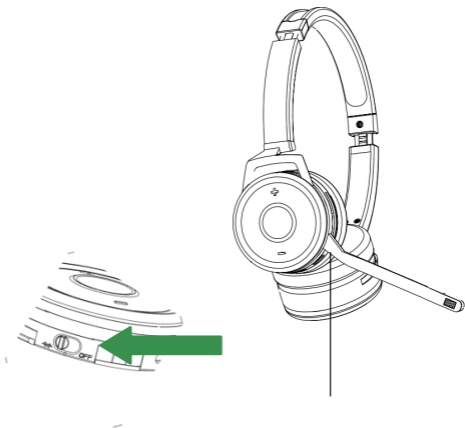





1. Wear the headset.
2. Hold (2 secs) the On/off/connect switch in the connect position until you hear the voice guided instructions. The Bluetooth indicator will flash blue.
3. Follow the voice guided instructions to connect.

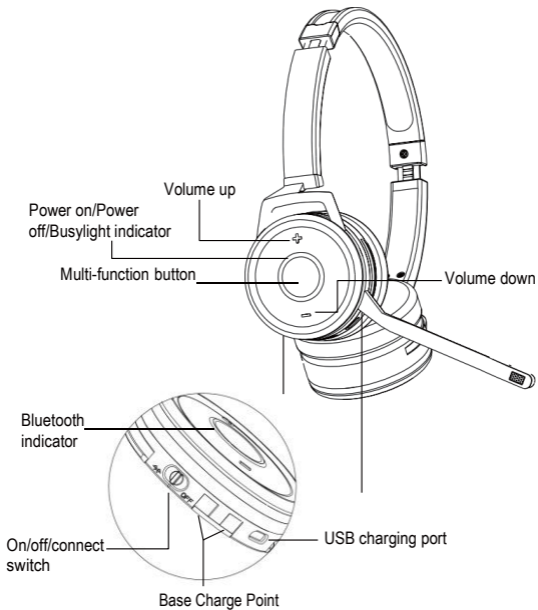

6. HOW TO USE




6.1 EVERYDAY USE

	FUNCTION	ACTION	LED STATUS
	Headset on	Slide the on switch	Green Light flash twice in succession
	Headset off	Slide the off switch	Red Light flash twice in succession
	Pairing	Slide the Pair Button	Blue Light flash
	Pairing successfully		Blue Light flash twice in succession
	Standby		Blue Light flash 1 time per 8 secs
	Answer/end call	Tap the Multi-function button	
	Reject call	Double-tap the Multi-function button	
	Enable/disable voice prompts	Press and hold the Multi-function button while turning on the headset	
	Adjust volume	Tap the volume up or volume down button	
	Mute/unmute microphone	Press and hold (2 secs) the volume down button	

6.2 MULTIPLE CALL HANDLING

The headset can accept and handle multiple calls at the same time.

	FUNCTION	ACTION
	End current call and answer incoming call	Tap the Multi-function button
	Put current call on hold and answer incoming call	Press and hold (2 secs) the Multi-function button
	Switch between held call and active call	Press and hold (2 secs) the Multi-function button
	Reject incoming call, when on a call	Double-tap the Multi-function button

7. SUPPORT

7.1 HOW TO CARE FOR YOUR HEADSET

Always store the headset with the power off and safely protected.
Avoid storage at extreme temperatures (above 55°C or below -10°).
This can shorten battery life and may adversely affect the headset.

8. TECHNICAL SPECIFICATIONS

ODNW65UC BT HEADSET

Headset weight:	158 g
Stereo headset:	L 155 mm x W 36 mm x H 180 mm
Wear Style:	Headband
Talk Time:	10 hours
Charging Time:	3 hours
Charging Base:	Optional
Microphones:	Noise cancelling microphone
Speaker Size:	40 mm
Speaker frequency range:	20hz - 20 kHz
Cable length:	Connect to PC for charge: 1500 mm
Operating temperature:	-10°C to 55°C
Storage temperature:	-20°C to 25°C

BLUETOOTH ADAPTER SPECIFICATION
(USB Dongle)

PC connection: USB 2.0

Bluetooth version: 4.2

Bluetooth range: Up to 30m (100 feet), Class 1

Bluetooth profiles: A2DP (V1.2), Hands free profile (V1.6)

Simultaneous Bluetooth connection: 1

Support SoftPhone : Skype for Business/3CX Phone

Bluetooth audio bandwidth : HD voice (wideband), A2DP

Visual indicators: Multicolor LED

9. Product Disposal Treatment and FCC statement

1. Dispose of in accordance with local regulations as headphones and recycling regulations. Never treated headset as household waste. Do not dispose of the headset in a fire, this battery may explode. If damaged, the battery may explode.

2. FCC statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF Warning Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Made in China
MODEL: ODNW65UC



Declaration of Conformity can be found on